


STANDARD:

- Investment Casting Body & Cap
- ASNI 150LB
- Wheel Handle Operation
- Casting Handle
- Design Standard:ASME B16.34
- Flange Standard:ASME B16.5
- Inspection Standard:API598

Technical Date			
Test Pressure	Shell Test	3.0	MPA
	Tightness Test	3.5	
	Gas-Tightness Test	0.8	
Max Working temperature		-40°C~+250°C	
Applicable Medium:Water,Oil,Gas,Acid			



MG1020

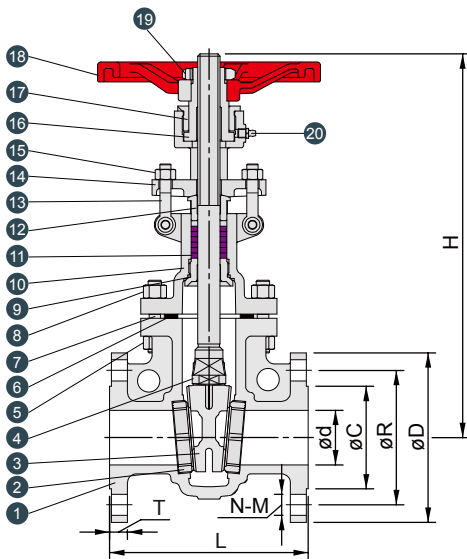

No.	PART NAME	MATERIAL		
1	Body	CF8M	CF8	WCB
2	Seat	CF8M	CF8	WCB
3	Disc	CF8M	CF8	WCB
4	Stem	SS316	SS304	F6A
5	Nut	SS304		
6	Gasket	SS304+Graphite		
7	Bolt	SS304		
8	Nut	SS04		
9	Seal	SS316	SS04	F6A
10	Bonnet	CF8M	CF8	WCB
11	Stem Packing	Graphite		
12	Gland	CF8	WCB	
13	Eye Bolt	A193-B7		
14	Top Gland	CF8	WCB	
15	Nut	SS304		
16	Sleeve	Bronze		
17	Stop Nut	SS304	A105	
18	Handle	FCD		
19	Stem Nut	SS304	A105	
20	Oil Hole	Bronze		

Unit:mm

SIZE	d	L	H	W	C	R	D	T	N	M
1/2"	15	108	195	120	35	60.5	89	11.2	4	16
3/4"	20	117	210	120	43	70	98	11.2	4	16
1"	25	127	240	140	51	80	108	12.0	4	16
1¼"	32	140	300	180	64	89	117	12.7	4	16
1½"	40	165	395	200	73	98.5	125	17.9	4	16
2"	50	178	400	200	92.1	121	150	19.5	4	19
2½"	65	191	435	200	105	140	180	22.7	4	19
3"	80	203	515	250	127	152	190	24.3	4	19
4"	100	229	595	280	157	191	230	24.3	8	19
5"	125	254	725	280	186	216	255	24.3	8	22
6"	150	267	780	300	216	242	280	25.9	8	22
8"	200	292	975	350	242	299	345	29	8	22